


NEW



* AC-22A: Connection of mixed resistive and inductive loads, also with moderate overloads.

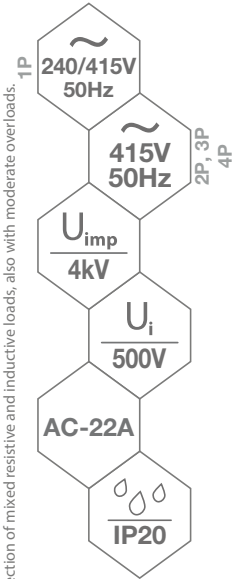

SR8-1P




SR8-2P



SR8-3P




SR8-4P

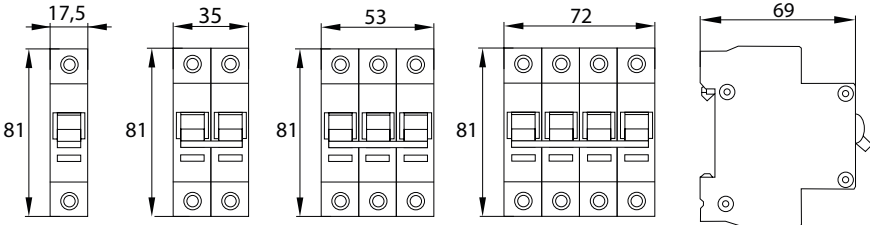

terminal capacity:
max. 25mm²



possibility
of sealing



trip indicator light



possibility to connect
with comb rails



descriptive box



DIN35 rail mounting

Schelingner

code

- A11-SR8-1P-032
- A11-SR8-1P-063
- A11-SR8-2P-032
- A11-SR8-2P-063
- A11-SR8-3P-063
- A11-SR8-3P-100
- A11-SR8-4P-063
- A11-SR8-4P-100



EAN

- 5900280983190
- 5900280983206
- 5900280983213
- 5900280983220
- 5900280983237
- 5900280983244
- 5900280983251
- 5900280983268



package

- 1/12/120
- 1/12/120
- 1/6/60
- 1/3/30
- 1/4/40
- 1/4/40
- 1/3/30
- 1/3/30

I_e

rated switching current [A]

- 32
- 63
- 32
- 63
- 63
- 100
- 63
- 100